

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922) 49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Ижевск (3412)26-03-58
Иваново (4932)77-34-06
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-96-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сыктывкар (8212)25-95-17
Сургут (3462)77-98-35
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Улан-Удэ (3012)59-97-51
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93


Киргизия (996)312-96-26-47
Россия (495)268-04-70
Казахстан (772)734-952-31

<https://exotek.nt-rt.ru> || exox@nt-rt.ru

Бесконтактный влагомер для древесины, MC-300WS

APPLICATIONS & FEATURES

The MC-300WS is a capacitance measuring moisture meter. It works on the principle of measuring the dielectric constant. A high frequency electrical field penetrates the material to be measured and produces a signal which is related to the moisture content. The signal is evaluated by the microprocessor and the zero point is corrected. Then the correct material group is selected, the moisture content is determined and displayed at once.

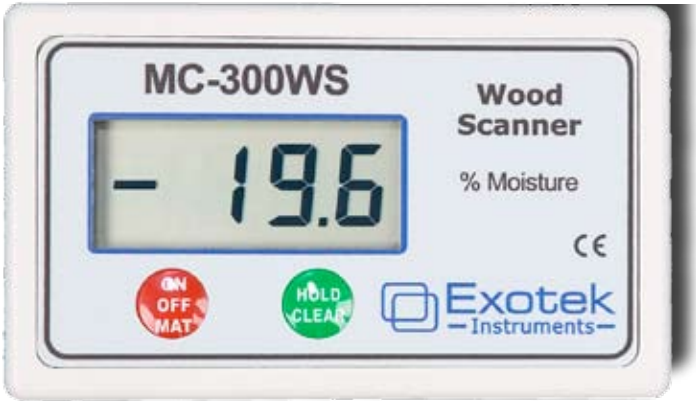

TECHNICAL SPECIFICATION	MC-300ws
INTENDED USERS:	Wood workers, cabinet and furniture makers, flooring installers, contractors and quality assurance inspectors. Anyone who needs a professional quality tool to inspect wood or wood products for accurate moisture content
MEASURING RANGE-WOOD	0-80% H ₂ O
SCANNING DEPTH APPROX.	5-25 mm
MEASURING DENSITY GROUP	9/466 wood types All together 9 selectable wood-groups means a much better adjustment to the different types of wood according to the density/cubic meter More than 466 types of wood, local as well as exotic, are divided into the wood-groups.
DENSITY RANGE	200-1100 kg/m3
HOLD FUNCTION	Yes
ALARM FUNCTION	No
AUTOMATIC SWITCH OFF	Yes
AUTOMATIC 0-CORRECTION	Yes
LOW BATTERY WARNING	Yes
OPERATING TEMPERATURE	-10°C/+60°C
DISPLAY	LCD Digital
RESOLUTION	0,1%
HOUSING MATERIAL	ABS
SENSOR	Chrome plated steel
POWER SUPPLY	9 V alkaline battery
CARRYING CASE	Artificial leather
DIMENSIONS (h x w x d)	60 x 102 x 27 mm
WEIGHT WITH BATTERY	130 g
WARRANTY	1 year

Complete with following accessories:
9 Volt battery and Carrying Case

